




BRAIDED HOSES

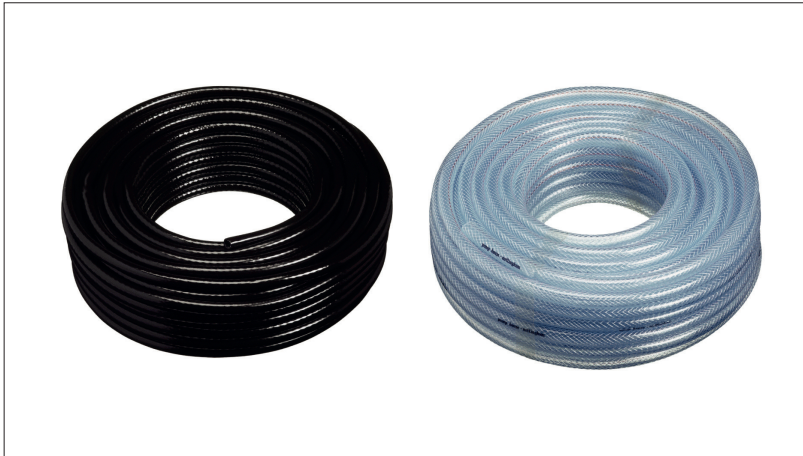

Now available in 6 and 30 metre coils. This reinforced PVC hose is suitable for condensate drains and come packaged in clear shrink wrap for protection and easy storage. Black reinforced PVC hose has no light penetration, preventing build-up of bacterial mould growth.

FEATURES

- Available in 6 and 30 metre lengths
- Available in clear or black
- Maximum temperature +60°
- Minimum temperature -15°

RELATED PRODUCTS



- **Imperial 307-FP**
Compact shear for 1 mm to 13 mm O.D. plastic tubing and non-metal reinforced hose. Spring loaded for safety - closes automatically.



- **Imperial 327-FP**
For 4 mm to 20 mm O.D. plastic tubing and non-metal reinforced hose. Can be wall- or bench-mounted for production, or carried in a toolbox.

Part code	Description	ID	OD	Working	Burst	Min bend radius	Min temp*	Max temp
RVT-1/4	1/4" x 30m clear	6mm	10mm	7	21	30°	-15°C	+60°C
RVT-3/8	3/8" x 30m clear	10mm	14mm	8	24	30°	-15°C	+60°C
RVT-1/2	1/2" x 30m clear	12mm	16mm	6	18	30°	-15°C	+60°C
RVT-5/8	5/8" x 30m clear	16mm	20mm	6	18	30°	-15°C	+60°C
RVT-1/4-B	1/4" x 30m black	6mm	10mm	7	21	30°	-15°C	+60°C
RVT-3/8-B	3/8" x 30m black	10mm	14mm	8	24	30°	-15°C	+60°C
RVT-1/2-B	1/2" x 30m black	12mm	16mm	6	18	30°	-15°C	+60°C
RVT-1/2-6	1/2" x 6m clear	12mm	16mm	6	18	30°	-15°C	+60°C
RVT-3/4-6	3/4" x 6m clear	19mm	23mm	6	18	30°	-15°C	+60°C

* Hoses stored in conditions above +5°C will be easier to handle / install.

ACCESSORIES BRAIDED HOSES

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global



Glaisdale Drive East
Nottingham NG8 4LY
United Kingdom