


PH-5L-HW - HIGH TEMPERATURE & PRESSURE RELIEF PUMP




The heavy-duty Giant!

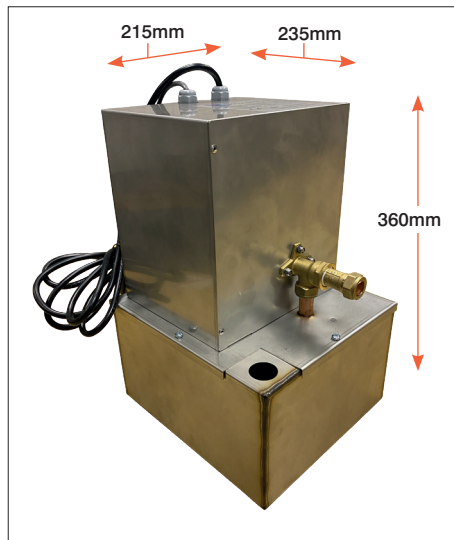

Manufactured in the UK this heavy duty, high temperature tank pump incorporates thermal overload protection and high level alarm switch. Ideal for unvented cylinder T&P discharge and steam humidifiers. Having one of the largest discharge rates of 20 litres per minute this pump can handle both high temperature up to 100 degrees and high flow rates.

FEATURES

- High-level safety switch
- Max. flow 1200LPH / 20LPM
- Max. head 10m
- Max. head for unvented cylinders 8m
- Discharge rate volume 20 LPM
- 15mm copper outlet
- 25mm inlet
- 15mm non-return valve

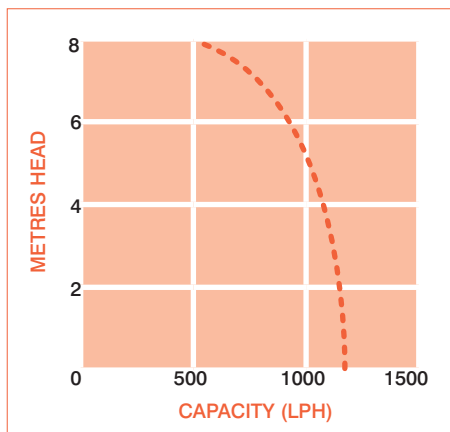

THE PACKAGE

- 5L stainless steel tank pump
- Brass none return valve
- ***

RELATED PRODUCTS

- Trunking
- PVC coated insulation



MAX. FLOW 1200 LPH / 20 LPM



TANK CAP. 5L

TECHNICAL SPECIFICATIONS

Part code	Max. lift	Discharge size	Watts	Temperature	Amps	Volts
PH-5L-HW	10m	15mm	180W	100°C	0.75A	240V

High level alarm	Inlet height	Weight	On level	Off level	Outlet	Inlet	Hz
Volt free	130mm	8.5kg	100mm	95mm	15mm	25mm	50Hz

*** 3/4" barb connector and NRV for coffee applications

PUMPS PH-5L-HW

Heavy-Duty Hot Water Pump

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to sales@diversitech.com or visit www.diversitech.global



Glaisdale Drive East
Nottingham NG8 4LY
United Kingdom