





ACCESS






## ■ FLEXI CUSTOM PLATFORMS & WALKWAYS

A TAILORED SOLUTION TO FIT AROUND EXISTING ROOFTOP BUILDING SERVICES

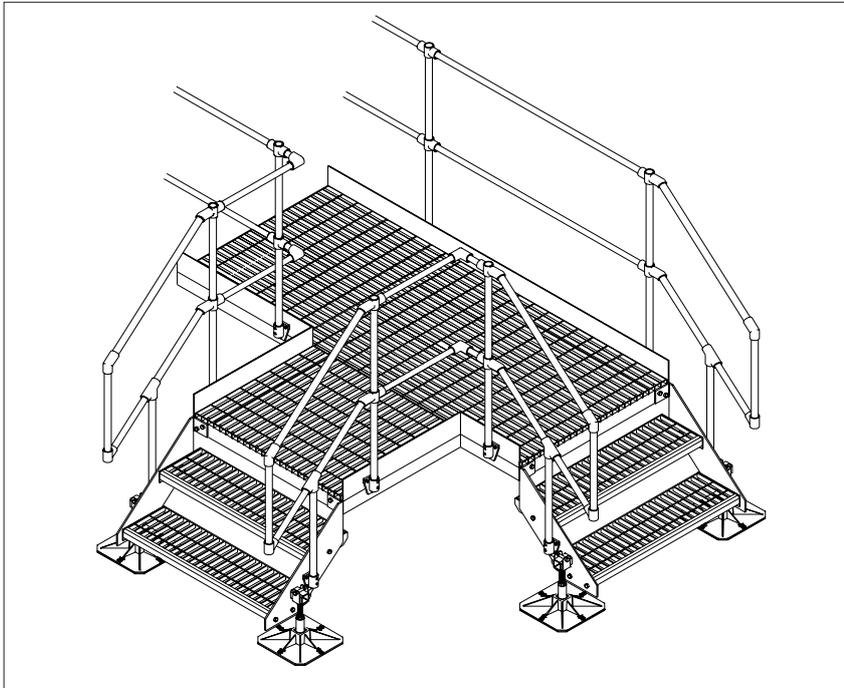

## ■ FEATURES & BENEFITS

- Non-penetrative access solutions
- Site survey carried out by us
- Auto-CAD drawings forwarded for approval prior to manufacturing start
- Supplied flat packed in kit form for easy handling
- Complies with current British Standards
- Safeguards the workforce from rooftop falls
- Protection to the building owner/ end user with regards to The Work at Height Regulations 2005



## FLEXI-ACCESS FLEXI Custom Platforms & Walkways

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@flexisupportsystems.co.uk](mailto:sales@flexisupportsystems.co.uk) or visit [www.flexisupportsystems.co.uk](http://www.flexisupportsystems.co.uk)






## ■ FLEXI CUSTOM PLATFORMS AND WALKWAYS

Flexi custom platforms and walkways are designed to provide solutions for maintenance and fire exit access. Diversitech can attend site, and carry out a thorough site survey from which we will generate accurate drawing proposals.

These will be forwarded for approval to the project team prior to manufacture. They are manufactured from mild steel with a hot-dip galvanised finish. Alternatively, we can offer aluminium or GRP solutions upon request. Designed to comply with British Standards, these versatile and easy to assemble solutions are supplied with M24 adjustable legs (to cater for the roof fall), and supported by our 320mm square feet.

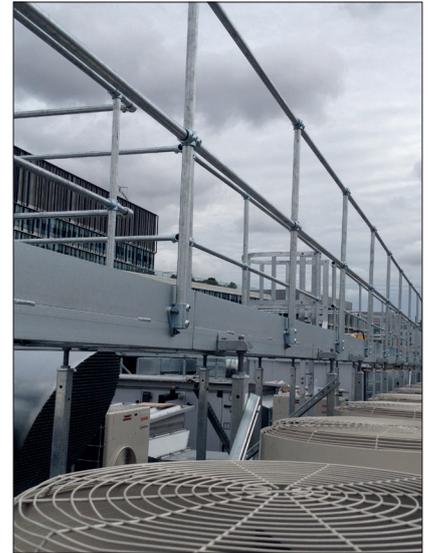

## ■ APPLICATION

- Generally positioned on flat roofs providing access to rooftop building services and fire exit access solutions

## ■ WHAT OUR SERVICE OFFERS YOU

- Quotations on request
- Full Auto-CAD drawing support
- Site support and site surveys
- Load management calculations
- Over 25 years experience in flat roof design, and providing support systems to building services
- Fast delivery
- Experienced in-house technical staff

## ■ MATERIAL SPECIFICATION

- Foot - 320mm square UV stabilised 100% polypropylene
- Mat - 100% natural rubber (mat is adhered to the foot)
- Legs - Step overs 48mm dia. 3mm steel tube with M24 stud adjuster. Hop-overs 40 x 40 x 2mm SHS
- Handrails - 33.7mm diameter Kee-klamp (or similar) c/w interchangeable fittings
- Treads/Flooring - 25 x 3mm open grid flooring. (41/100 bearing bars) and designed to 7.5kN/m<sup>2</sup> loading BS:4592 part 1
- Finish - Hot dip galvanised steelwork BS EN 10219: 1 :2006
- Galvanising: BS EN ISO 1461 :2009. Salt mist treating: BS EN 60068-2:52

DiversiTech supply access solutions that utilise stairs, companion way ladders or cat ladders, or a combination of all of these. Ramped access solutions are also available upon request.

Manufactured to current British Standards, Diversitech supply the solutions flat packed with all necessary fixings for a quick assembly on site by others.

We offer an efficient manufacturing and galvanising process, and can supply goods to site usually within 10 - 15 working days.

### Specification Extract

Flexi Custom Platform and Walkways will be supplied by DiversiTech Flexi Custom Access solutions  
Tel: +44(0)115900 5858