



## REDBOX-TRUNK



A mini condensate pump in the REDBOX series of pumps.

Designed to automatically remove the drainage liquid produced by air conditioners of a maximum 7kW cooling capacity.

CODE: REDBOX-TRUNK



## SPECIFICATIONS

Item	Specification	Item	Specification
Use with	Air conditioner (Max. 7kW)	Fluid	Fresh water of 1-40°C
Power supply	100-240V, 50-60Hz	Non-continuously rated operating time	5 min on / 1 min off
Electrical output	3W	Decibel rating	21 DB(A)
Safety switch contacts	Max. 3A	Pump size (LxWxH)	95.4 x 44 x 109.7mm
Max. discharge head	15m	Reservoir size (LxWxH)	81 x 44 x 24.9mm
Max. flow rate at zero head	20 LPH	Trunking size (WxH)	80 x 60mm
		Drink cycle	16ml

## FLOW RATES

Head	0m	2m	4m	6m	8m	10m	12m	14m	15m
LPH	20	18	16	14	10	8	5	2	0

The REDBOX TRUNK is designed for straightforward installation and can be fitted to either the left- or right-hand side of the air conditioning system. Additionally, this pump features a physical float switch within the reservoir—a key reliability feature that is not always offered on comparable pumps.



## REDBOX SERIES

### REDBOX TRUNK

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom

## REDBOX-MINI-UNIVERSAL



### REDBOX MINI

A mini condensate pump in the REDBOX series of pumps.

Designed to automatically remove the drainage liquid produced by air conditioners of a maximum 7kW cooling capacity.

CODE: REDBOX-UNIVERSAL




## SPECIFICATIONS

Item	Specification	Item	Specification
Use with	Air conditioner (Max. 7kW)	Fluid	Fresh water of 1-40°C
Power supply	100-240V, 50-60Hz	Non-continuously rated operating time	5 min on / 1 min off
Electrical output	3W	Decibel rating	21 DB(A)
Safety switch contacts	Max. 3A	Pump size (LxWxH)	95.4 x 44 x 109.7mm
Max. discharge head	15m	Reservoir size (LxWxH)	81 x 44 x 24.9mm
Max. flow rate at zero head	20 LPH	Drink cycle	16ml

## FLOW RATES

Head	0m	2m	4m	6m	8m	10m	12m	14m	15m
LPH	20	18	16	14	10	8	5	2	0

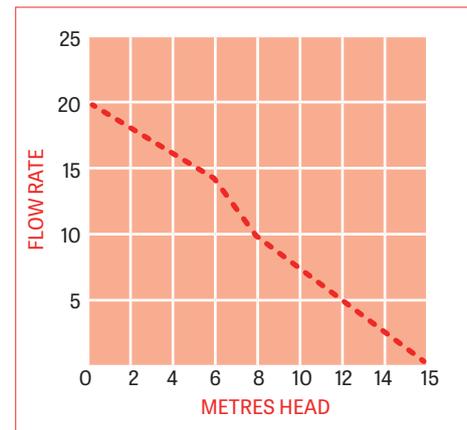

## REDBOX SERIES

### REDBOX MINI-UNIVERSAL

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom

## REDBOX-MINI-COMPACT



### REDBOX MINI



A mini condensate pump in the REDBOX series of pumps.

Designed to automatically remove the drainage liquid produced by air conditioners of a maximum 7kW cooling capacity.

CODE: REDBOX-COMPACT




## SPECIFICATIONS

Item	Specification	Item	Specification
Use with	Air conditioner (Max. 7kW)	Fluid	Fresh water of 1-40°C
Power supply	100-240V, 50-60Hz	Non-continuously rated operating time	3 minutes-
Electrical output	3W	Decibel rating	21 DB(A)
Safety switch contacts	Max. 3A	Working without fluid coming through the pump	Less than 1 minute only
Max. suction head	3m	Pump size (LxWxH)	119 x 31.5 x 50mm
Max. discharge head	15m	Reservoir size (LxWxH)	75 x 43.2 x 40.3mm
Max. flow rate at zero head	20 LPH	Drink cycle	12ml

## FLOW RATES

Head	0m	2m	4m	6m	8m	10m	12m	14m	15m
LPH	20	18	16	14	10	8	5	2	0

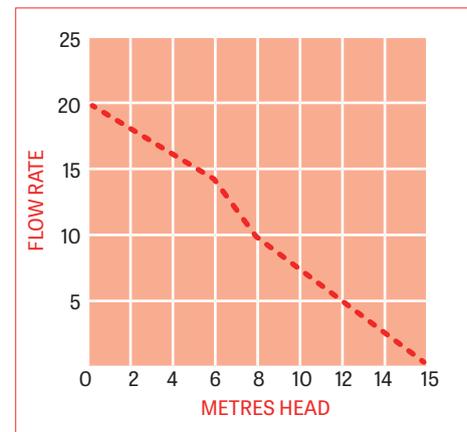

## REDBOX SERIES

### REDBOX MINI-COMPACT

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom

**REDBOX-MINI-TUBE**



**REDBOX MINI**



A mini condensate pump in the REDBOX series of pumps.

Designed to automatically remove the drainage liquid produced by air conditioners of a maximum 7kW cooling capacity.

CODE: REDBOX-TUBE




**SPECIFICATIONS**

Item	Specification	Item	Specification
Use with	Air conditioner (Max. 7kW)	Fluid	Fresh water of 1-40°C
Power supply	100-240V, 50-60Hz	Non-continuously rated operating time	3 minutes
Electrical output	3W	Decibel rating	21 DB(A)
Safety switch contacts	Max. 3A	Working without fluid coming through the pump	Less than 1 minute only
Max. suction head	3m	Pump size (LxWxH)	159.8 x 36.8 x 31mm
Max. discharge head	15m	Reservoir size (LxWxH)	75 x 43.2 x 40.3mm
Max. flow rate at zero head	20 LPH	Drink cycle	10ml

**FLOW RATES**

Head	0m	2m	4m	6m	8m	10m	12m	14m	15m
LPH	20	18	16	14	10	8	5	2	0

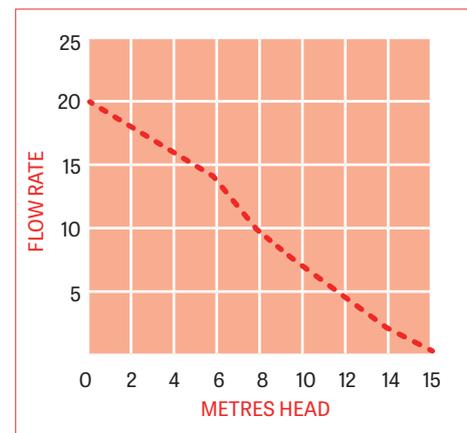

**REDBOX SERIES**


**REDBOX MINI-TUBE**

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



## REDBOX-SLIM

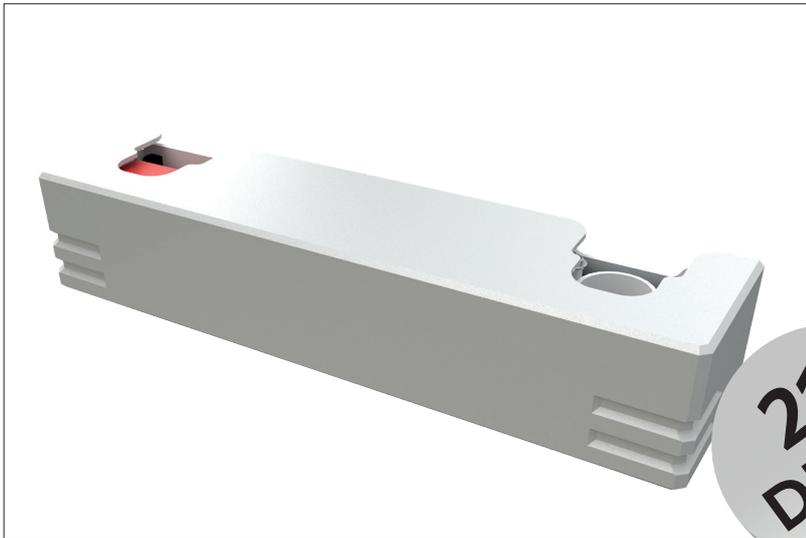

Undermount pump for systems.

A mini condensate pump in the REDBOX series of pumps.

Designed to automatically remove the drainage liquid produced by air conditioners of a maximum 16kW cooling capacity.

CODE: REDBOX-SLIM




## SPECIFICATIONS

capacity of ac	Up to 54,000 BTU/h (16kW)
power supply	100-240V 50/60Hz
power consumption	2.5W
Max. discharge head	20m
max. flow rate	29 LPH
size of outlet port	6mm

available fluid	Condensate of 1-40°C
intermittant rating	3 minutes
safety switch	Max 3A
Drink cycle	20ml
dimensions (l x w x h)	282 X 62 X 59mm
weight	0.5kg

## FLOW RATES

Head	0m	2m	4m	6m	8m	10m	12m	14m	16m	18m	20m
LPH	29	24	19	15	12	10	8	6	4	2	0

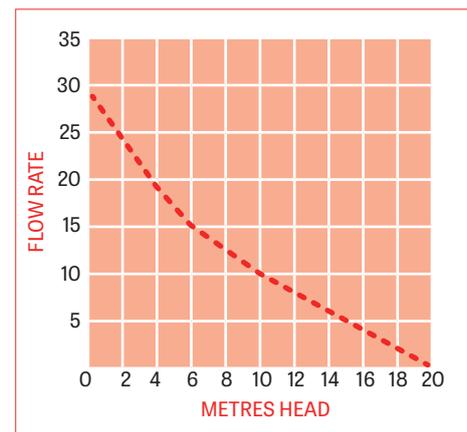

# REDBOX SERIES

## REDBOX SLIM

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom



**REDBOX-1L-S - 1 LITRE CONDENSATE PUMP**



The DiversiTech RedBox 1 Litre Tank Pump is a condensate tank pump with a flow rate of 280 LPH and a lift of 5.1 metres. This pump has metal mounting tabs which allows the tank to be screwed to the wall. The universal power lead makes the pump easy to install, service and retrofit. The unique LED indicators highlight when the pump has power, is running and when the high level alarm has been activated.

CODE: REDBOX-1L-S

**FEATURES**

- Supplied with both 3/8" and 1/4" removable check valves
- Four inlet holes
- Metal hang tabs
- Vibration Isolation on feet

**THE PACKAGE**

- 1 litre tank pump
- 3/8" check valve
- 1/4" check valve
- 3 inlet caps
- Installation instructions

**RELATED PRODUCTS**

- Braided hose
- S&V adaptor
- Cassette adaptors



**MAX. FLOW** 280 LPH



**TANK CAP.** 1L



**DECIBEL RATING** 44 dB(A)

**POWER ON LED**



**RUN LED**



**ALARM LEVEL LED**



**2M POWER LEAD PLUG**



Part code	Max. lift	Discharge size	Watts	IP	Amps	Volts	HZ
REDBOX-1L-S	5.1m	3/8" / 1/4"	60W	20	1.0A	230V	50Hz

High level alarm	Inlet height fr. base	Weight	Cable length	Drink cycle	On level	Off level	Reserve before overflow	Alarm level
230V/3A	48mm	2.3kg	1.8m	400ml	23mm	9mm	170ml	25mm

**REDBOX SERIES**

**REDBOX  
1L**

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)



Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom



## REDBOX-2L-S - 2 LITRE CONDENSATE PUMP



The DiversiTech RedBox 2 Litre Tank Pump is a condensate tank pump with a flow rate of 280 LPH and a lift of 5.1 metres. This pump has metal mounting tabs which allows the tank to be screwed to the wall. The universal power lead makes the pump easy to install, service and retrofit. The unique LED indicators highlight when the pump has power, is running and when the high level alarm has been activated.

CODE: REDBOX-2L-S

### FEATURES

- Supplied with both 3/8" and 1/4" removable check valves
- Four inlet holes
- Metal hang tabs
- Vibration Isolation on feet

### THE PACKAGE

- 2 litre tank pump
- 3/8" check valve
- 1/4" check valve
- 3 inlet caps
- Installation instructions

### RELATED PRODUCTS

- Braided hose
- S&V adaptor
- Cassette adaptors



**MAX. FLOW** 280 LPH



**TANK CAP.** 2L



**DECIBEL RATING** 44 dB(A)

#### POWER ON LED



#### RUN LED



#### ALARM LEVEL LED



#### 2M POWER LEAD PLUG



Part code	Max. lift	Discharge size	Watts	IP	Amps	Volts	HZ
REDBOX-2L-S	5.1m	3/8" / 1/4"	60W	20	1.0A	230V	50Hz

High level alarm	Inlet height fr. base	Weight	Cable length	Drink cycle	On level	Off level	Reserve before overflow	Alarm level
230V/3A	112mm	2.3kg	1.8m	145	47mm	6.5mm	375ml	52mm

## REDBOX SERIES

### REDBOX 2L

Condensate pumps

The DiversiTech International sales team are available to answer your questions or queries on this product. Our experts are waiting for your call +44 (0)115 900 5858 or if you prefer send an email to [sales@diversitech.com](mailto:sales@diversitech.com) or visit [www.diversitech.global](http://www.diversitech.global)

Glaisdale Drive East  
Nottingham NG8 4LY  
United Kingdom